




AW AIR NOZZLE

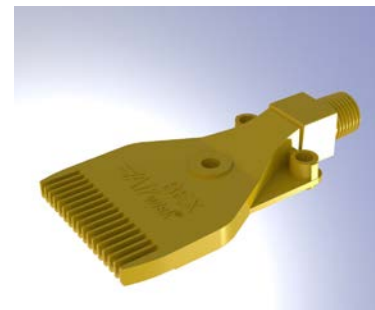

AW Series Airwisk™ Blow-off Nozzles

SPRAY CHARACTERISTICS:


BEX Airwisk nozzles produce a concentrated flat fan pattern of high impact air for cooling, drying and blow off applications. The Airwisk's design efficiently controls compressed air usage, reduces energy costs and provides optimum air distribution.

CONSTRUCTION:

The BEX Airwisk is made of hard-wearing ABS plastic (rated to 150° F) and has a maximum pressure of 100 PSIG. The Airwisk can be mounted individually or side by side to provide greater coverage.

TYPICAL APPLICATIONS:

- Cooling of Components/Parts
- Cleaning and Drying of Parts
- Air Curtains
- Debris Removal

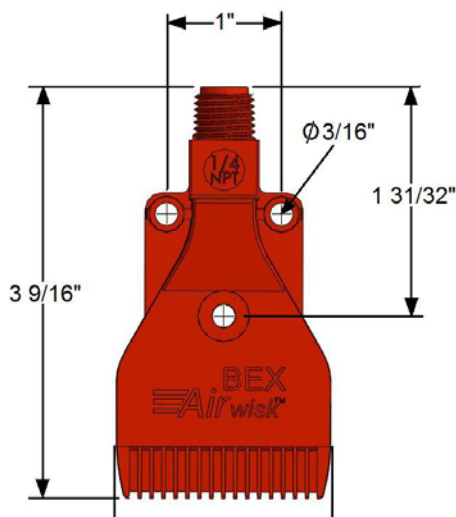

Model	Thread Size	CAPACITY AT VARIOUS PRESSURES (SCFM)				
		10 psi	20 psi	30 psi	60 psi	90 psi
1/4AW15	1/4	6.5	21.1	12.3	20.5	28.7