




WA SELF CLEANING SHOWER NOZZLES

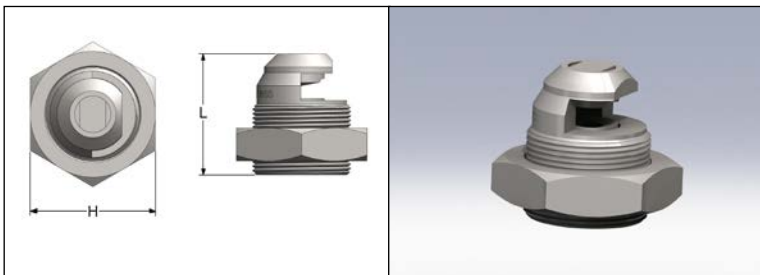

SPRAY CHARACTERISTICS:

Available in flat fan and solid stream (0 degree) models, these self-cleaning nozzles reduce shower maintenance. By reducing the supplied pressure, an internal piston retracts to purge fibers and other suspended solids from the clogged nozzle.

CONSTRUCTION:

Standard material of construction is 316 stainless steel.

TYPICAL APPLICATIONS:

- Cleaning Fabric (wire)
- Cleaning Felts
- Pre-wetting Showers
- Knock-off Showers
- Lubrication Shower

Standard thread size is 1 1/8" - 20.

DIMENSIONS

NOZZLE TYPE	Dim. H	Dim. L
WA	1 1/2	1 5/8

Spray Angle @ 40 psi	Model	CAPACITY AT VARIOUS PRESSURES (USGPM)													
		20 psi	30 psi	40 psi	50 psi	60 psi	70	80	90	100	120	140	180 psi	200 psi	250 psi
0° Solid Stream	WA0002	0.14	0.17	0.20	0.22	0.25	0.27	0.28	0.30	0.32	0.35	0.37	0.42	0.45	0.50
	WA0006	0.42	0.52	0.60	0.67	0.73	0.79	0.85	0.90	0.95	1.04	1.12	1.27	1.34	1.50
	WA0008	0.57	0.69	0.80	0.89	0.98	1.06	1.13	1.20	1.26	1.39	1.50	1.70	1.79	2.00
	WA0010	0.71	0.87	1	1.12	1.22	1.32	1.41	1.5	1.58	1.73	1.87	2.12	2.24	2.5
15°	WA1506	1.06	1.3	1.5	1.68	1.84	1.98	2.12	2.25	2.37	2.6	2.81	3.2	3.4	3.8
30°	WA3005	0.35	0.43	0.5	0.56	0.61	0.66	0.71	0.75	0.79	0.87	0.94	1.06	1.12	1.25
	WA3014	0.99	1.21	1.4	1.57	1.71	1.85	1.98	2.1	2.21	2.42	2.62	2.97	3.13	3.5
40°	WA4012	0.85	1.04	1.2	1.34	1.47	1.59	1.7	1.8	1.9	2.08	2.24	2.55	2.68	3
	WA4014	0.99	1.21	1.4	1.57	1.71	1.85	1.98	2.1	2.21	2.42	2.62	2.97	3.13	3.5
	WA4032	2.26	2.77	3.2	3.6	3.9	4.2	4.5	4.8	5.1	5.5	6	6.8	7.2	8
45°	WA4516	1.13	1.39	1.6	1.79	1.96	2.12	2.26	2.4	2.53	2.77	2.99	3.4	3.6	4
	WA4525	1.77	2.17	2.5	2.8	3.06	3.3	3.5	3.8	4	4.3	4.7	5.3	5.6	6.2
50°	WA5032	2.26	2.77	3.2	3.6	3.9	4.2	4.5	4.8	5.1	5.5	6	6.8	7.2	8
60°	WA6016	1.13	1.39	1.6	1.79	1.96	2.12	2.26	2.4	2.53	2.77	2.99	3.4	3.6	4
	WA6038	2.69	3.3	3.8	4.2	4.7	5	5.4	5.7	6	6.6	7.1	8.1	8.5	9.5
80°	WA8011	0.78	0.95	1.1	1.23	1.35	1.46	1.56	1.65	1.74	1.91	2.06	2.33	2.46	2.75
	WA8030	2.12	2.6	3	3.4	3.7	4	4.2	4.5	4.7	5.2	5.6	6.4	6.7	7.5
	WA8046	3.3	4	4.6	5.1	5.6	6.1	6.5	6.9	7.3	8	8.6	9.8	10.3	11.5
110°	WA11011	0.78	0.95	1.1	1.23	1.35	1.46	1.56	1.65	1.74	1.91	2.06	2.33	2.46	2.75
120°	WA12008	0.57	0.69	0.8	0.89	0.98	1.06	1.13	1.2	1.26	1.39	1.5	1.7	1.79	2
130°	WA13016	1.13	1.39	1.6	1.79	1.96	2.12	2.26	2.4	2.53	2.77	2.99	3.4	3.6	4
	WA13025	1.77	2.17	2.5	2.8	3.06	3.3	3.5	3.8	4	4.3	4.7	5.3	5.6	6.2