




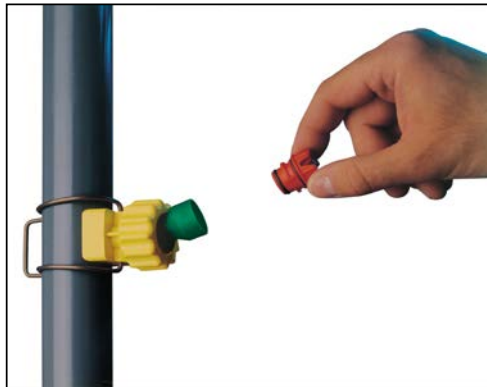

MODEL ZSW SERIES SPRAY NOZZLE

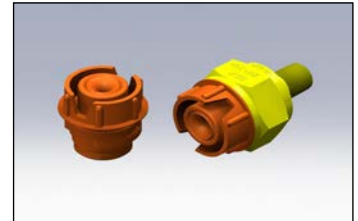

Also available with Tabz®

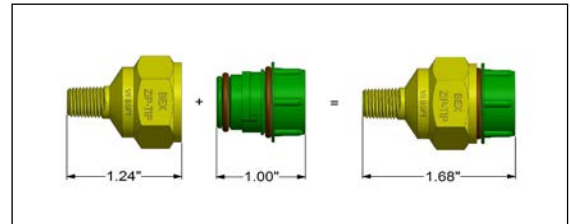

CHARACTERISTICS:

BEX Molded Plastic Zip-Tip® Spray Nozzles are designed to allow fast and easy installation and removal of spray nozzle tips and adapters, while providing positive alignment of spray pattern. Double VITON® O-Ring seals are supplied standard with each nozzle tip. Seals are located on, and removed with, the nozzle tip for easy flushing. A variety of models and spray patterns are available.

CONSTRUCTION:

Molded plastic spray nozzles are available in glass reinforced polypropylene or PVDF (Kynar®). Other materials are available upon request. All models are available in either NPT or BSPT threads. (NOTE: Metal and molded plastic ZIP-TIP® components are not interchangeable.)

TYPICAL APPLICATIONS:

- Spray Washing & Rinsing
- Parts Cleaning
- Pretreatment

Model	Max. Free Passage (in)	CAPACITY AT VARIOUS PRESSURES (USGPM)											SPRAY ANGLE @ (degrees)		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	60 psi	80 psi	100 psi	150 psi	7 psi	20 psi	80 psi
ZS2.8W	0.051	0.20	0.23	0.28	0.34	0.40	0.48	0.56	0.69	0.79	0.89	1.08	110	105	96
ZS4.3W	0.051	0.30	0.36	0.43	0.53	0.61	0.74	0.86	1.05	1.22	1.36	1.67	117	108	100
ZS5.6W	0.064	0.33	0.38	0.46	0.56	0.65	0.80	0.92	1.13	1.30	1.45	1.78	117	110	100
ZS8W	0.081	0.57	0.67	0.80	0.98	1.13	1.39	1.60	1.96	2.26	2.53	3.10	118	110	103
ZS10W	0.091	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.45	2.83	3.2	3.9	118	108	102
ZS12W	0.091	0.85	1.00	1.20	1.47	1.70	2.08	2.40	2.94	3.4	3.8	4.6	120	112	102
ZS14W	0.091	0.99	1.17	1.40	1.71	1.98	2.42	2.80	3.4	4.0	4.4	5.4	118	114	104
ZS17W	0.102	1.20	1.42	1.70	2.08	2.40	2.94	3.4	4.2	4.8	5.4	6.6	118	117	102
ZS20W	0.102	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.9	5.7	6.3	7.7	120	120	106
ZS24W	0.102	1.70	2.01	2.40	2.94	3.4	4.2	4.8	5.9	6.8	7.6	9.3	122	118	106