



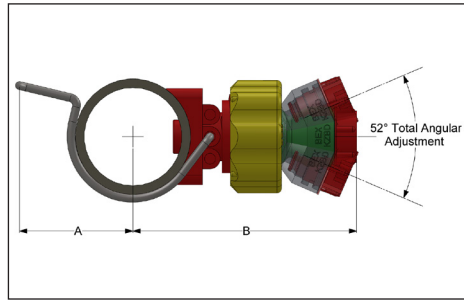

KZF 50 ASSEMBLY SPECIFICATIONS

50° SPRAY ANGLE · FLAT SPRAY · CLIP-ON CONNECTION

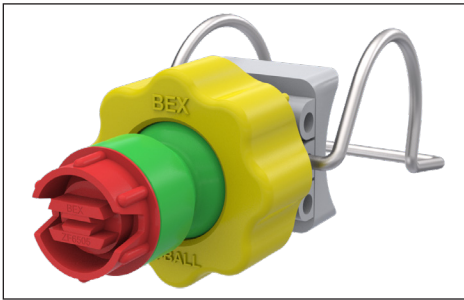

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:


F50 series spray nozzles produce a flat, fan shaped spray pattern, with a spray angle of 50° at 40 PSI. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

TYPICAL APPLICATIONS:

- Parts Cleaning
- Foam control
- Vehicle Washing
- Fertilizer spraying
- Metal Washing
- Gravel Washing
- Dishwashers

CONSTRUCTION:

Made of corrosion-resistant plastic and stainless steel. Heavy-duty spring clip good to 100 PSI at 175° F. KZF assemblies clip over a pre-drilled pipe (9/16" dia. hole). Features a ZKBD adapter and an injection molded Zip-Tip nozzle, allowing for easy installation/removal of the nozzle tip, while providing positive alignment of the spray pattern. Nozzle tips available in Polypropylene and PVDF.

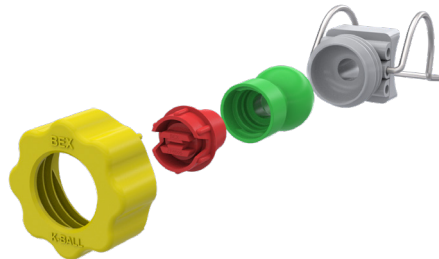

Pipe Size	Dim A (inches)	Dim B (inches)
1"	1.69	3.46
1¼"	1.85	3.5
1½"	1.92	3.5
2"	2.67	3.85

Model #	Tip Color	Equiv. Orif. Dia. mm	Capacities at Various Pressures LPM													Spray Angles		
			0.3 bar	0.5 bar	0.7 bar	1.0 bar	1.5 bar	2 bar	3 bar	4 bar	5 bar	7 bar	10 bar	20 bar	30 bar	1.5 bar	3 bar	5 bar
ZF5002	Lime Green	0.86	0.250	0.32	0.38	0.46	0.56	0.64	0.79	0.91	1.02	1.21	1.44	2.04	2.50	43°	50°	57°
ZF5003	Lime Green	1.04	0.37	0.48	0.57	0.68	0.84	0.97	1.18	1.37	1.53	1.81	2.16	3.06	3.7	44°	50°	57°
ZF5004	Lime Green	1.19	0.50	0.64	0.76	0.91	1.12	1.29	1.58	1.82	2.04	2.41	2.88	4.1	5.0	44°	50°	56°
ZF5005	Lime Green	1.35	0.62	0.81	0.95	1.14	1.40	1.61	1.97	2.28	2.55	3.01	3.6	5.1	6.2	44°	50°	56°
ZF5006	Lime Green	1.47	0.62	0.81	0.95	1.14	1.40	1.61	1.97	2.28	2.55	3.01	3.6	5.1	6.2	45°	50°	56°
ZF5008	Lime Green	1.70	1.00	1.29	1.53	1.82	2.23	2.58	3.16	3.6	4.1	4.8	5.8	8.2	10.0	45°	50°	56°
ZF5010	White	1.91	1.25	1.61	1.91	2.28	2.79	3.2	3.9	4.6	5.1	6.0	7.2	10.2	12.5	43°	50°	55°
ZF5012	Orange	2.08	1.50	1.93	2.29	2.73	3.3	3.9	4.7	5.5	6.1	7.2	8.6	12.2	15.0	43°	50°	55°
ZF5015	Grey	2.31	1.87	2.42	2.86	3.4	4.2	4.8	5.9	6.8	7.6	9.0	10.8	15.3	18.7	43°	50°	55°
ZF5020	Lt. Blue	2.67	2.50	3.2	3.8	4.6	5.6	6.4	7.9	9.1	10.2	12.1	14.4	20.4	25.0	43°	50°	55°
ZF5030	Purple	3.28	3.7	4.8	5.7	6.8	8.4	9.7	11.8	13.7	15.3	18.1	21.6	30.6	37	43°	50°	54°
ZF5040	Green	3.78	5.0	6.4	7.6	9.1	11.2	12.9	15.8	18.2	20.4	24.1	28.8	41	50	43°	50°	54°
ZF5050	Yellow	4.24	6.2	8.1	9.5	11.4	14.0	16.1	19.7	22.8	25.5	30.1	36	51	62	43°	50°	53°
ZF5060	Blue	4.62	7.5	9.7	11.4	13.7	16.7	19.3	23.7	27.3	30.6	36	43	61	75	43°	50°	53°
ZF5070	Red	5.00	8.7	11.3	13.3	16.0	19.5	22.6	27.6	32	36	42	50	71	87	43°	50°	53°



KZF 50 SPRAY NOZZLE SPECIFICATIONS

50 DEGREE SPRAY ANGLE · FLAT SPRAY · CLIP-ON CONNECTION

www.BEX.com