



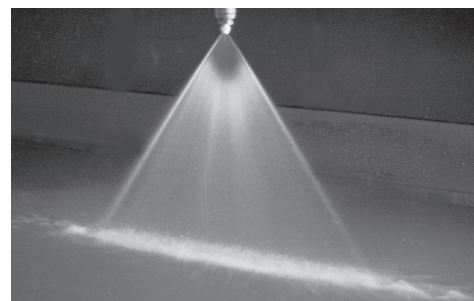

ZF110 MOLDED SPRAY NOZZLE

FLAT SPRAY • ZIP-TIP CONNECTION

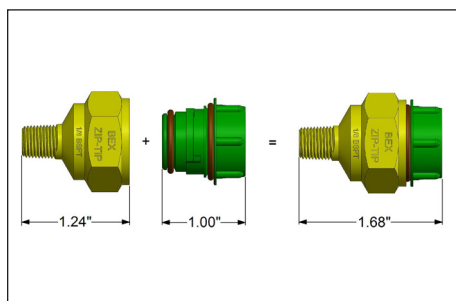

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:

ZF-series spray nozzles produce a flat, fan shaped spray pattern, with spray angles available from 0° to 110° at 40 PSI.

CONSTRUCTION:

Z-Body connection sizes are available in NPT and BSPT thread sizes of 1/8", 1/4", 3/8", and 1/2". Metal and molded plastic ZIP-TIP components are not interchangeable. Zip-Tips can be ordered as complete assemblies, or as replacement tips only.



ZF Zip-Tips are available with finger Tabz for easy insertion and removal

MATERIALS AVAILABLE:

POLYOROPYLENE (LL) - (Green)


Excellent chemical and corrosion resistance. Useful up to 175°F

NATURAL POLYPROPYLENE (LN) Non-pigmented for optimum purity

PVDF (KK) - (Red) Excellent durability and abrasion resistance and is inert to most chemicals. Useful up to 300°F.

NATURAL PVDF (KN)

Non-pigmented for optimum purity.

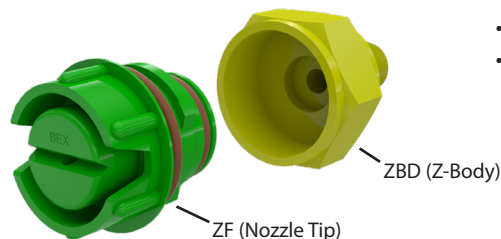

TYPICAL APPLICATIONS:

- Printed Circuit Board Washing
- PCB-Etching/Developing
- Semiconductor Manufacturing
- Pressure Washing
- Street Sweeping
- Carpet Cleaning
- Fruit and Vegetable Washing
- Plating Processing
- Dust Supression
- Acid Spraying
- Degreasing
- Coating Applications
- Foam Control
- Metal Washing
- Chemical Spraying
- Rising Parts

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures													Spray Angles		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF11003	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	92	110	118
ZF11004	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	90	110	112
ZF11005	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	96	110	114
ZF11006	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	97	110	115
ZF11008	0.067	0.32	0.38	0.45	0.55	0.64	0.78	0.90	1.01	1.10	1.27	1.42	1.74	2.46	100	110	115
ZF11010	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	102	110	115
ZF11015	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	102	110	115
ZF11020	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	103	110	112

* TABLE CONTINUES ON FOLLOWING PAGE



ZF-MOLDED NOZZLE SPECIFICATIONS

110 DEGREE SPRAY ANGLE • FLAT SPRAY • ZIP-TIP CONNECTION

www.BEX.com

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures													Spray Angles		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF11030	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	103	110	112
ZF11040	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	103	110	112
ZF11050	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	107	110	116
ZF11060	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	104	110	112
ZF11070	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	107	110	112