



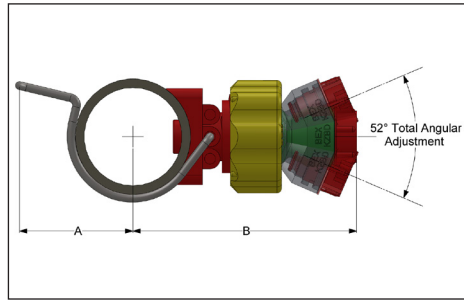

KZF 65 ASSEMBLY SPECIFICATIONS

65° SPRAY ANGLE · FLAT SPRAY · CLIP-ON CONNECTION

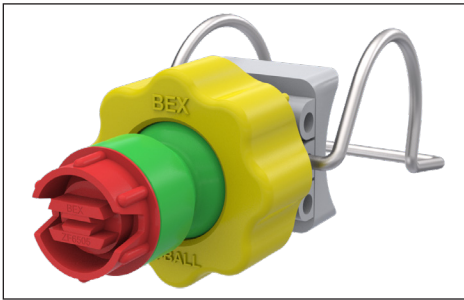

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:


F65 series spray nozzles produce a flat, fan shaped spray pattern, with a spray angle of 65° at 40 PSI. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

CONSTRUCTION:

Made of corrosion-resistant plastic and stainless steel. Heavy-duty spring clip good to 100 PSI at 175° F. KZF assemblies clip over a pre-drilled pipe (9/16" dia. hole). Features a KZBD adapter and an injection molded Zip-Tip nozzle, allowing for easy installation/removal of the nozzle tip, while providing positive alignment of the spray pattern. Nozzle tips available in Polypropylene and PVDF.

TYPICAL APPLICATIONS:

- Parts Cleaning
- Foam control
- Vehicle Washing
- Fertilizer spraying
- Metal Washing
- Gravel Washing
- Dishwashers

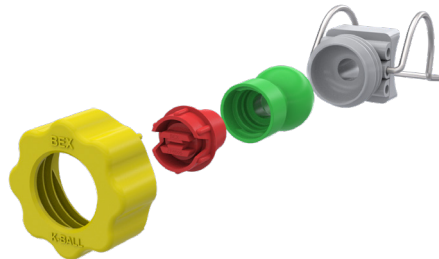

Pipe Size	Dim A (inches)	Dim B (inches)
1"	1.69	3.46
1¼"	1.85	3.5
1½"	1.92	3.5
2"	2.67	3.85

Model #	Tip Color	Equiv. Orif. Dia. inches	Capacities at Various Pressures USGPM													Spray Angles		
			5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF6502	Lime Green	0.034	0.071	0.084	0.100	0.122	0.141	0.173	0.200	0.224	0.245	0.283	0.32	0.39	0.55	53°	65°	72°
ZF6503	Lime Green	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	53°	65°	72°
ZF6504	Lime Green	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	54°	65°	72°
ZF6505	Lime Green	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	54°	65°	72°
ZF6506	Lime Green	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	54°	65°	72°
ZF6508	Lime Green	0.067	0.283	0.33	0.40	0.49	0.57	0.69	0.80	0.89	0.98	1.13	1.26	1.55	2.19	55°	65°	71°
ZF6510	White	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	57°	65°	73°
ZF6512	Orange	0.082	0.42	0.50	0.60	0.73	0.85	1.04	1.20	1.34	1.47	1.70	1.90	2.32	3.3	59°	65°	71°
ZF6515	Grey	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	59°	65°	72°
ZF6520	Lt. Blue	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	61°	65°	72°
ZF6530	Purple	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	62°	65°	72°
ZF6540	Green	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	63°	65°	72°
ZF6550	Yellow	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	63°	65°	73°
ZF6560	Blue	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	63°	65°	73°
ZF6570	Red	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	63°	65°	74°



KZF 65 SPRAY NOZZLE SPECIFICATIONS

65 DEGREE SPRAY ANGLE · FLAT SPRAY · CLIP-ON CONNECTION

www.BEX.com