



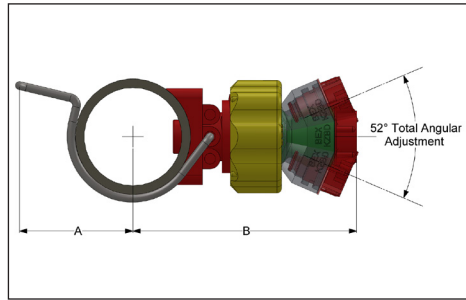

KZF 95 ASSEMBLY SPECIFICATIONS

95° SPRAY ANGLE • FLAT SPRAY • CLIP-ON CONNECTION

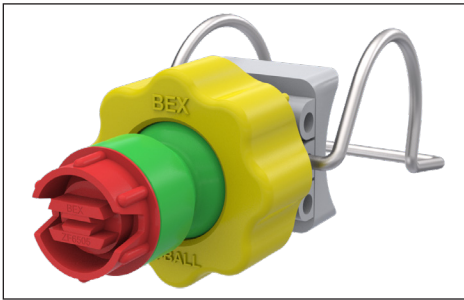

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:


F95 series spray nozzles produce a flat, fan shaped spray pattern, with a spray angle of 95° at 40 PSI. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

TYPICAL APPLICATIONS:

- Parts Cleaning
- Foam control
- Vehicle Washing
- Fertilizer spraying
- Metal Washing
- Gravel Washing
- Dishwashers

CONSTRUCTION:

Made of corrosion-resistant plastic and stainless steel. Heavy-duty spring clip good to 100 PSI at 175° F. KZF assemblies clip over a pre-drilled pipe (9/16" dia. hole). Features a KZBD adapter and an injection molded Zip-Tip nozzle, allowing for easy installation/removal of the nozzle tip, while providing positive alignment of the spray pattern. Nozzle tips available in Polypropylene and PVDF.

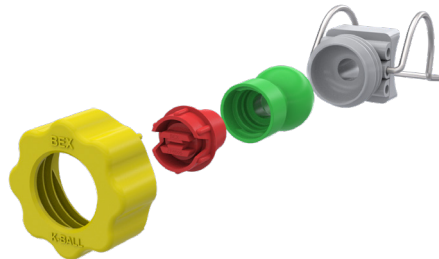

Pipe Size	Dim A (inches)	Dim B (inches)
1"	1.69	3.46
1¼"	1.85	3.5
1½"	1.92	3.5
2"	2.67	3.85

Model #	Tip Color	Equiv. Orif. Dia. inches	Capacities at Various Pressures USGPM													Spray Angles		
			5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF9503	Lime Green	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	96°	95°	101°
ZF9504	Lime Green	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	86°	95°	101°
ZF9505	Lime Green	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	86°	95°	101°
ZF9506	Lime Green	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	86°	95°	101°
ZF9508	Lime Green	0.067	0.283	0.33	0.40	0.49	0.57	0.69	0.80	0.89	0.98	1.13	1.26	1.55	2.19	86°	95°	100°
ZF9510	White	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	88°	95°	99°
ZF9515	Grey	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	90°	95°	100°
ZF9520	Lt. Blue	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	89°	95°	99°
ZF9530	Purple	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	90°	95°	101°
ZF9540	Green	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	90°	95°	100°
ZF9550	Yellow	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	91°	95°	101°
ZF9560	Blue	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	92°	95°	102°
ZF9570	Red	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	92°	95°	103°



KZF 95 SPRAY NOZZLE SPECIFICATIONS

95 DEGREE SPRAY ANGLE • FLAT SPRAY • CLIP-ON CONNECTION

www.BEX.com