

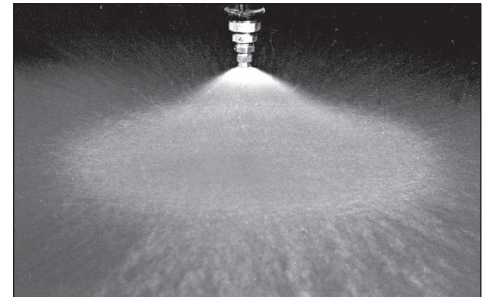


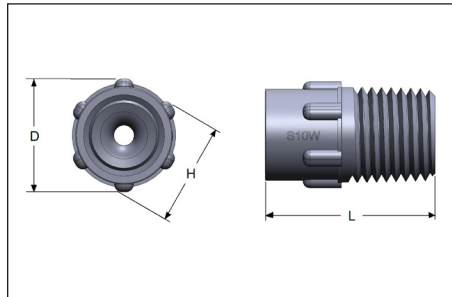

SW MOLDED SPRAY NOZZLES

FULL CONE • THREADED CONNECTION

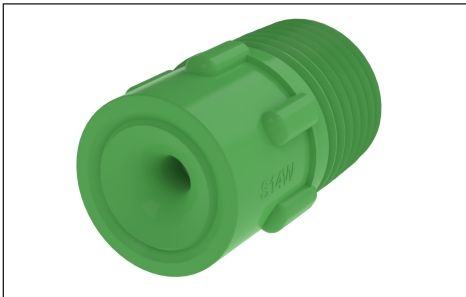

SPRAY CHARACTERISTICS:

A wide angle full cone spray pattern, with uniform distribution throughout the cone. Spray angle is approximately 110°-120° at 10PSI.

TYPICAL APPLICATIONS:

- Printed Circuit Board Washing
- PCB-Etching/Developing
- Semiconductor Manufacturing
- Carpet Cleaning
- Fruit and Vegetable Washing
- Plating Processes
- Dust Suppression
- Acid Spraying
- Degreasing
- Coating Applications
- Metal Washing

CONSTRUCTION:

Each BEX molded nozzle is designed with a series of "knobs" which makes them easier to finger tighten than a hex, especially when wet. The design feature of a small starter barrel greatly reduces the tendency to strip or cross-thread the nozzle during installation.

Nozzle Size	Dim 'A'	Dim 'B'	Dim 'L'
1/8SW	0.62	9/16	0.81
1/4SW	0.62	9/16	0.96
3/8SW	0.77	11/16	1.10

All dimensions are in inches

MATERIALS AVAILABLE:

POLYPROPYLENE (LL) - (Green)
Excellent chemical and corrosion resistance. Useful up to 175°F

NATURAL POLYPROPYLENE (LN) Non-pigmented for optimum purity

PVDF (KK) - (Red) Excellent durability and abrasion resistance and is inert to most chemicals. Useful up to 300°F.

NATURAL PVDF (KN)
Non-pigmented for optimum purity.

Model ID	Max. Free Passage	Capacities at Various Pressures												Spray Angle		
		3 psi	5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	60 psi	80 psi	100 psi	150 psi	7 psi	20 psi	80 psi
1/8S2.8W	0.051	0.153	0.198	0.234	0.280	0.34	0.40	0.48	0.56	0.69	0.79	0.89	1.08	110	105	96
1/8S4.3W	0.051	0.236	0.304	0.36	0.43	0.53	0.61	0.74	0.86	1.05	1.22	1.36	1.67	117	108	100
1/8S5.6W	0.064	0.307	0.40	0.47	0.56	0.69	0.79	0.97	1.12	1.37	1.58	1.77	2.17	117	110	100
1/4S5.6W	0.064	0.307	0.40	0.47	0.56	0.69	0.79	0.97	1.12	1.37	1.58	1.77	2.17	120	108	102
1/8S8W	0.081	0.44	0.57	0.67	0.80	0.98	1.13	1.39	1.60	1.96	2.26	2.53	3.10	118	110	103
1/4S10W	0.091	0.55	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.45	2.83	3.2	3.9	118	108	102
1/4S12W	0.091	0.66	0.85	1.00	1.20	1.47	1.70	2.08	2.40	2.94	3.4	3.8	4.6	120	112	102
1/4S14W	0.091	0.77	0.99	1.17	1.40	1.71	1.98	2.42	2.80	3.4	4.0	4.4	5.4	118	114	104

* TABLE CONTINUES ON FOLLOWING PAGE



SW-MOLDED NOZZLE SPECIFICATIONS
FULL CONE SPRAY • THREADED CONNECTION

www.BEX.com