



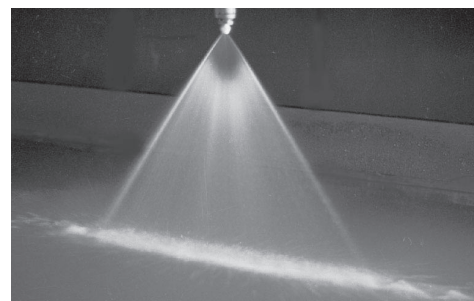

ZF95 MOLDED SPRAY NOZZLE

FLAT SPRAY • ZIP-TIP CONNECTION

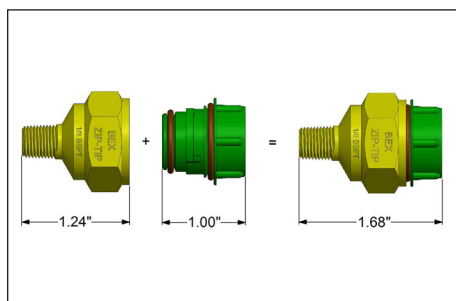

SPRAY CHARACTERISTICS:

ZF-series spray nozzles produce a flat, fan shaped spray pattern, with spray angles available from 0° to 110° at 40 PSI.

CONSTRUCTION:

Z-Body connection sizes are available in NPT and BSPT thread sizes of 1/8", 1/4", 3/8", and 1/2". Metal and molded plastic ZIP-TIP components are not interchangeable. Zip-Tips can be ordered as complete assemblies, or as replacement tips only.



ZF Zip-Tips are available with finger Tabz for easy insertion and removal

MATERIALS AVAILABLE:

POLYOROPYLENE (LL) - (Green)


Excellent chemical and corrosion resistance. Useful up to 175°F

NATURAL POLYPROPYLENE (LN) Non-pigmented for optimum purity

PVDF (KK) - (Red) Excellent durability and abrasion resistance and is inert to most chemicals. Useful up to 300°F.

NATURAL PVDF (KN)

Non-pigmented for optimum purity.

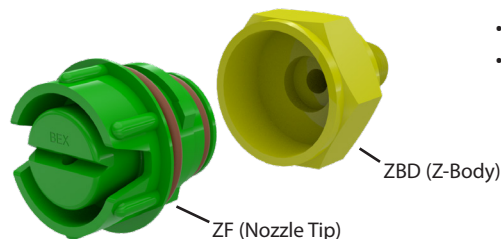

TYPICAL APPLICATIONS:

- Printed Circuit Board Washing
- PCB-Etching/Developing
- Semiconductor Manufacturing
- Pressure Washing
- Street Sweeping
- Carpet Cleaning
- Fruit and Vegetable Washing
- Plating Processing
- Dust Supression
- Acid Spraying
- Degreasing
- Coating Applications
- Foam Control
- Metal Washing
- Chemical Spraying
- Rising Parts

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures													Spray Angles		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF9503	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	96	95	101
ZF9504	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	86	95	101
ZF9505	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	86	95	101
ZF9506	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	86	95	101
ZF9508	0.067	0.283	0.33	0.40	0.49	0.57	0.69	0.80	0.89	0.98	1.13	1.26	1.55	2.19	86	95	100
ZF9510	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	88	95	99
ZF9515	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	90	95	100
ZF9520	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	89	95	99

* TABLE CONTINUES ON FOLLOWING PAGE



ZF-MOLDED NOZZLE SPECIFICATIONS

95 DEGREE SPRAY ANGLE • FLAT SPRAY • ZIP-TIP CONNECTION

www.BEX.com

Model ID	Equiv. Orif. Dia.	Capacities at Various Pressures													Spray Angles		
		5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF9530	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	90	95	101
ZF9540	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	90	95	100
ZF9550	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	91	95	101
ZF9560	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	92	95	102
ZF9570	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	92	95	103