



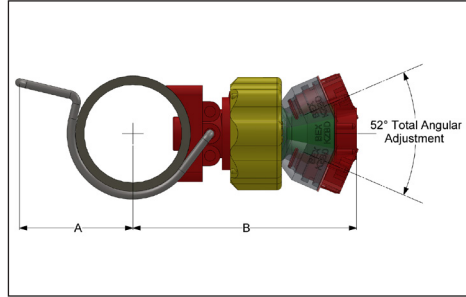

KZF 40 ASSEMBLY SPECIFICATIONS

40° SPRAY ANGLE • FLAT SPRAY • CLIP-ON CONNECTION

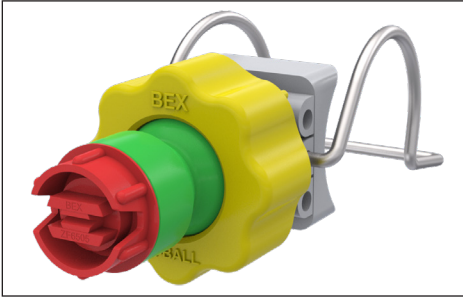

Spray angle not exactly as shown

SPRAY CHARACTERISTICS:


F40 series spray nozzles produce a flat, fan shaped spray pattern, with a spray angle of 40° at 40 PSI. Spray density tapers off toward the outside of these sprays, to permit overlapping of spray patterns while maintaining uniform spray density.

CONSTRUCTION:

Made of corrosion-resistant plastic and stainless steel. Heavy-duty spring clip good to 100 PSI at 175° F. KZF assemblies clip over a pre-drilled pipe (9/16" dia. hole). Features a KZBD adapter and an injection molded Zip-Tip nozzle, allowing for easy installation/removal of the nozzle tip, while providing positive alignment of the spray pattern. Nozzle tips available in Polypropylene and PVDF.

TYPICAL APPLICATIONS:

- Parts Cleaning
- Foam control
- Vehicle Washing
- Fertilizer spraying
- Metal Washing
- Gravel Washing
- Dishwashers

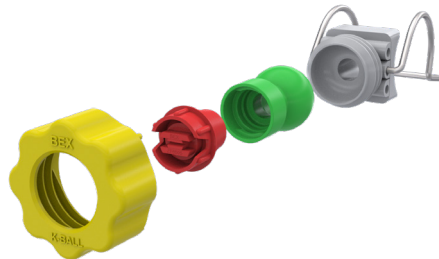

Pipe Size	Dim A (inches)	Dim B (inches)
1"	1.69	3.46
1¼"	1.85	3.5
1½"	1.92	3.5
2"	2.67	3.85

Model #	Tip Color	Equiv. Orif. Dia. inches	Capacities at Various Pressures USGPM													Spray Angles		
			5 psi	7 psi	10 psi	15 psi	20 psi	30 psi	40 psi	50 psi	60 psi	80 psi	100 psi	150 psi	300 psi	20 psi	40 psi	80 psi
ZF4002	Lime Green	0.034	0.071	0.084	0.100	0.122	0.141	0.173	0.200	0.224	0.245	0.283	0.32	0.39	0.55	26°	40°	46°
ZF4003	Lime Green	0.041	0.106	0.126	0.150	0.184	0.212	0.260	0.300	0.34	0.37	0.42	0.47	0.58	0.82	30°	40°	45°
ZF4004	Lime Green	0.047	0.141	0.167	0.200	0.245	0.283	0.35	0.40	0.45	0.49	0.57	0.63	0.77	1.10	32°	40°	45°
ZF4005	Lime Green	0.053	0.177	0.209	0.250	0.306	0.35	0.43	0.50	0.56	0.61	0.71	0.79	0.97	1.37	35°	40°	44°
ZF4006	Lime Green	0.058	0.212	0.251	0.300	0.37	0.42	0.52	0.60	0.67	0.73	0.85	0.95	1.16	1.64	37°	40°	44°
ZF4008	Lime Green	0.067	0.283	0.33	0.40	0.49	0.57	0.69	0.80	0.89	0.98	1.13	1.26	1.55	2.19	35°	40°	43°
ZF4010	White	0.075	0.35	0.42	0.50	0.61	0.71	0.87	1.00	1.12	1.22	1.41	1.58	1.94	2.74	30°	40°	43°
ZF4015	Grey	0.091	0.53	0.63	0.75	0.92	1.06	1.30	1.50	1.68	1.84	2.12	2.37	2.90	4.1	35°	40°	41°
ZF4020	Lt. Blue	0.105	0.71	0.84	1.00	1.22	1.41	1.73	2.00	2.24	2.45	2.83	3.2	3.9	5.5	33°	40°	43°
ZF4030	Purple	0.129	1.06	1.26	1.50	1.84	2.12	2.60	3.00	3.4	3.7	4.2	4.7	5.8	8.2	34°	40°	45°
ZF4040	Green	0.149	1.41	1.67	2.00	2.45	2.83	3.5	4.0	4.5	4.9	5.7	6.3	7.7	11.0	33°	40°	43°
ZF4050	Yellow	0.167	1.77	2.09	2.50	3.06	3.5	4.3	5.0	5.6	6.1	7.1	7.9	9.7	13.7	35°	40°	46°
ZF4060	Red	0.182	2.12	2.51	3.00	3.7	4.2	5.2	6.0	6.7	7.3	8.5	9.5	11.6	16.4	37°	40°	48°
ZF4070	Blue	0.197	2.47	2.93	3.5	4.3	4.9	6.1	7.0	7.8	8.6	9.9	11.1	13.6	19.2	36°	40°	47°



KZF 40 SPRAY NOZZLE SPECIFICATIONS

40 DEGREE SPRAY ANGLE • FLAT SPRAY • CLIP-ON CONNECTION

www.BEX.com